


Operation: 鉸鏈型



LTEM NO.:SIM-008
(Memory-SIM CARD SOCKETS)

Unit:mm

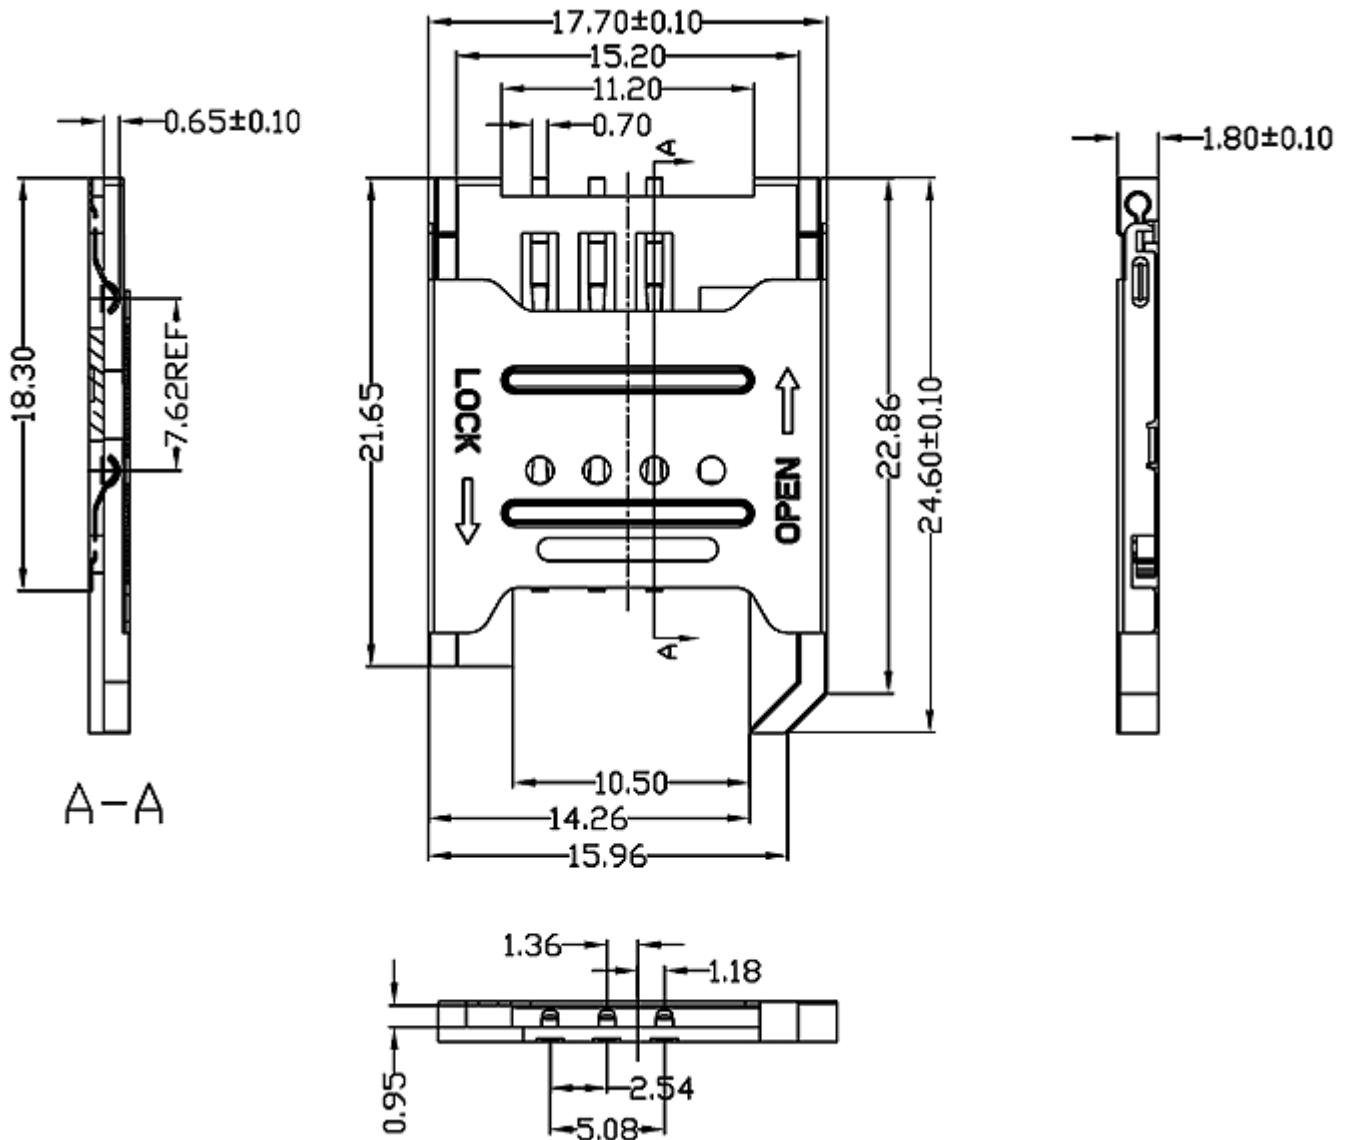

Technical parameter

PROJECT \ LEVEL		A[better product]	B[average product]	C[low product]
Electrical Properties	Initial Contact Resistance	30mΩ max.	30mΩ max.	no data!
	Contact Resistance	100mΩ min.100V DC Skey/PD: 50mΩ min.100V DC		
	Withstand Voltage	300V AC for 1min 250 V AC for 1min		
Durable Performance	There No Load	8,000 Cycles	7,000 Cycles	no data!
	Rated Load	6,500 Cycles 50mΩ max.	5,000 Cycles 30mΩ max.	no data!
Insertion Force		4.0Kgf MAX (Springback:)		


表面貼裝 SMT

側向導入 LATERAL

精密部品 NICETY

可靠 STABILIZE

適合環保 RoHS

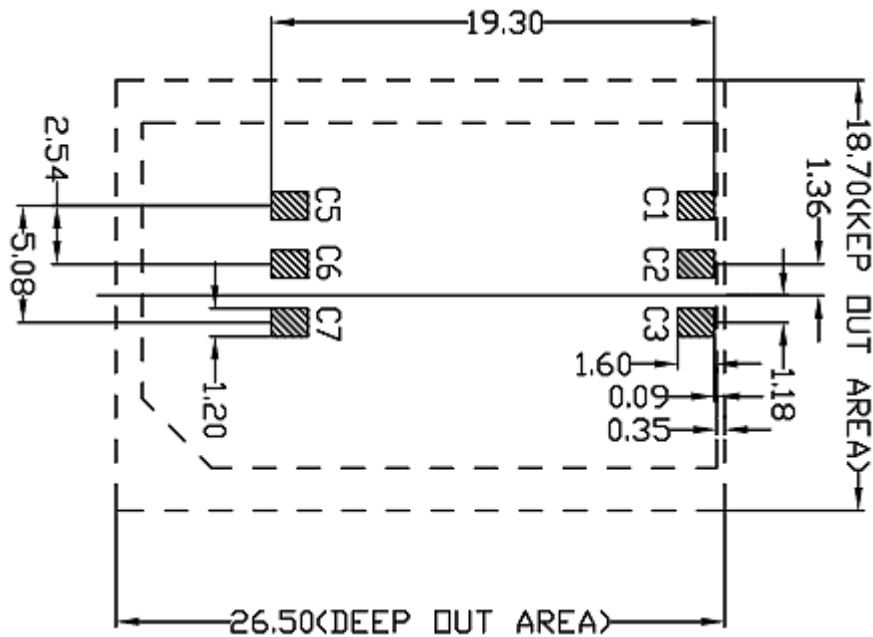CIRCUIT BOARD SIZE
(Vertical view)

本品不屬於危害性廢棄物,須丟棄時可以委託回收商予以回收再生處理。

運送時本產品不要直接與水、酸鹼性化學物質接觸,或放置於含有以上氣體環境中,並且需要注意會有滑落、側翻的危險發生;運輸過程中不能有碰撞或者擠壓,須保證溫度與濕度適中[常溫 25℃, 濕度在 50℃ 以內],不可導致材料變形或氧化。

PIN Assignment

SIM CARD Pin DESIGN			
Pin No.	Pin NAME	Type	Description
C①	卡電源	1	VCC
C②	復位	1	RST
C③	時鐘	1	CLK
C④	保留項	1	Reserved
C⑤	接地	1	GND
C⑥	Vpp	1	VPP
C⑦	輸入/輸出	1	I/O
C⑧	保留項	1	Reserved

本品不屬於危害性廢棄物,須丟棄時可以委託回收商予以回收再生處理。Products do not belong to hazardous waste, When waste can recycling processing

運送時本產品不要直接與水、酸鹼性化學物質接觸,或放置於含有以上氣體環境中,並且需要注意會有滑落、側翻的危險發生;運輸過程中不能有碰撞或者擠壓,須保證溫度與濕度適中[常溫 25℃, 濕度在 50℃ 以內],不可導致材料變形或氧化。

注記 NOTICE

1. 碩方電子公司擁有最終解釋權; The company reserves the right of final interpretation;
2. 文件禁止外洩、轉載; Leaked and reproduced prohibited;
3. 未經授權修改無效。Modify is invalid.